


TTAC COMPACT

hard water, easy solution.




Fine filtration and limescale prevention

All incoming water passes through the first stage 20 micron carbon filter and then the TAC media which converts the dissolved calcium and magnesium ions into harmless microscopic CaCO₃ crystals which do not form as limescale as they travel through the water system.

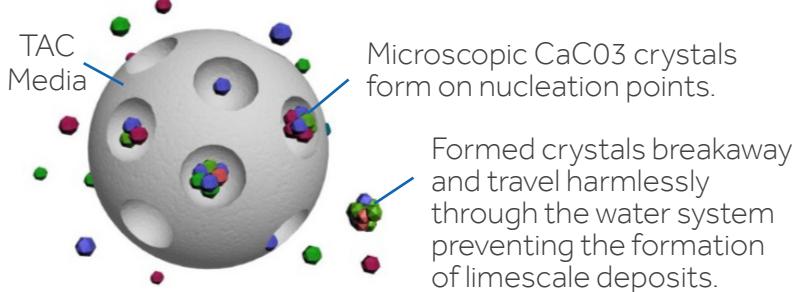

Specification

- 38 litres a minute maximum flow rate
- IN/OUT head with the option of 3/4" or 1" quick release connections.
- Maintenance - change cartridges as scheduled:
After 186,000 litres or maximum 1 year for the carbon pre filter and after 2 years for the TAC cartridge.



**BUY
NOW!**

TurboTAC - The cost-effective chemical and salt-free alternative to a water softener.



Inlet/Outlet Connection	3/4" - 1."
Temperature	4°C - 43°C
pH	6.5 to 8.5
Ferrous Iron, Max*	0.3 mg/L
Manganese, Max*	0.05 mg/L
Copper, Max*	1.3 mg/L
Water Pressure	1 bar min to 6 bar max



www.scalestop.co.uk



BS6920
CERTIFIED



Certified to
NSF/ANSI 61