



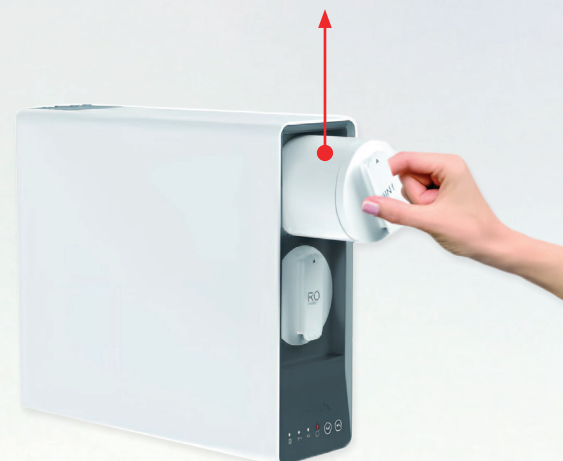

RO System **DE200**

- Stylish tankless space saving under sink design.
- Innovative 2 cartridge 4 stage filtration technology.
- Horizontal cartridges for easy access and quick changes.
- Smart rinse cycle to enhance membrane life.
- High pure water recovery rate at 2 litres per minute delivery.
- Direct delivery of pure water with no bulky storage tank.
- Low operating sound through better design.
- Filtered water delivery tap included.
- Installation kit included.

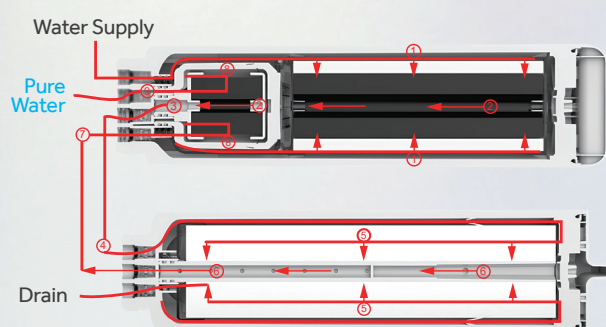

↓ Specifications on next page ↓

RO System **DE200**



Model		DE200
Water Supply		Municipal Water
Feed Line Pressure		1.38 - 5.2 bar
Permeate RO Output Flow Rate		2.6 L/min
Salt Rejection		≥93%
Recovery		65%
Feed Water Temperature		5-38°C
Ambient Humidity		≤90%
Sound Level		≤60dB
Electrical	Input	100 ~ 240V AC 50/60Hz
	Output	DC24V 5A
	Power Used	120W
Membrane	Type	Thin Film Composite Membrane
	Rating	1000 Gallons
Connection	Permeate RO	3/8" Quick Connect
	Inlet	3/8" Quick Connect
	Drain	1/4" Quick Connect
Accessory		Faucet & Installation Kit Included
Product Dimension (WxDxH)		137*433*405 mm
Carton Dimensions (WxDxH)		485*245*495 mm

*Salt rejection and water recovery are variable and can be effected by temperature and feed water conditions.

